

HATHORN® H12+

CONTROL MODULE

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Light Weight
9.5lbs/4.5kg



Screen Shot
Function



Industry
Leading
Warranty



Compatible with
18V Milwaukee®
or Equivalent Batteries



Internal
Hard Drive
128GB or
512GB



Daylight
Readable
Display



Record
to USB &
HDD



HATHORN
Info Bar



Full Size
Keyboard



Camera LED
Light Control

The new Hathorn H12+ control module is equipped with an industry leading impact resistant 12.1" LCD screen with almost three times the brightness of the "leading brand" making it the brightest monitor in its class. The H12+ is the pro's choice for any light condition, including direct sunshine, providing stunning picture quality, high contrast and up to 8X digital "pan & zoom" technology revealing details missed by other lateral push cameras.

With the H12+ you can save videos and screen shots to the internal memory or USB, operate in three menu languages, locate with dual 512Hz/640Hz high power sonde frequencies, imprint your company name with the on-screen information bar and 8 pages of text overlay, and extend your 18V external battery runtime with the built-in Hathorn battery extender feature. It will even automatically save your videos before powering down due to a low battery. Never lose another inspection video again!

Whether you are working in brutal Canadian winters or hot Arizona summers, inside or outside, a new standard for features and quality has been set with the Hathorn H12+.



HATHORN®
INSPECTION CAMERAS

North America 1-866-HATHORN

International 1-905-604-7040

hathorncorp.com sales@hathorncorp.com

HATHORN® H12⁺

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA

CONTROL MODULE

Specifications

Display

Size & Type	12.1" (30.7cm) impact resistant LCD
Resolution & Brightness	XGA 1024 x 768 pixels with 1,300 cd/m2
Zoom	1X, 2X, 4X, 8X with digital pan feature

Recording, Storage & Features

Recording Options	MPEG4 video (H.264 at 3 fps) & JPEG screenshot
Storage Options	USB, HDD or USB & HDD
USB Capacity	USB 2.0 up to 32Gb
Hard Drive Capacity	128Gb SSD (standard) or 512Gb SSD (upgrade)
Keyboard	Full sized QWERTY with silicone cover
Camera Head LED	Dimming control 5% increments
Hathorn Info Bar	74 characters over two lines with time/date
Text Overlay	8 Pages - save, recall, hide, delete
Menu Languages	English, Spanish, French
Audio	Integrated microphone and speaker
Footage Counter	Feet or meters with reset function
Sonde Frequencies	High power 512Hz or 640Hz
Reel Compatibility	All Hathorn reels 100-500ft. (except Wi-Fi)

Power


Battery (not incl.)	Only Milwaukee® M18 18V or equivalent
Battery Life	~4hrs. using 3.0Ah
Battery Extender	Auto dimming & auto saving
AC/DC Adapter	12V - 4.1A (included)

Weight & Dimensions


Weight without Battery	9.5lb (4.3Kg)
Dimensions (L x W x H)	15" x 12" x 5.5" (38cm x 30cm x 14cm)

Environmental

Water Resistance	IP65 when lid closed / IP64 when lid open
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)

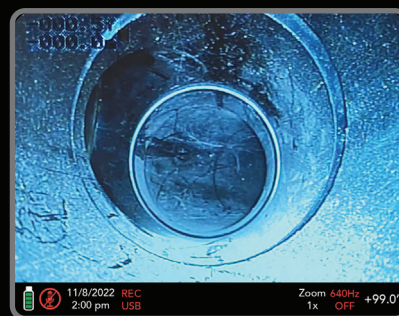

The Hathorn Info Bar at the bottom of the screen allows you to see battery life, speaker function, time and date, recording file location, zoom, sonde frequency/function and footage. The info bar is customizable allowing you to put your company or client info at the bottom of the screen, recorded throughout the video. The newly designed, intuitive menus allow for a minimal learning curve. You are up and running in minutes.

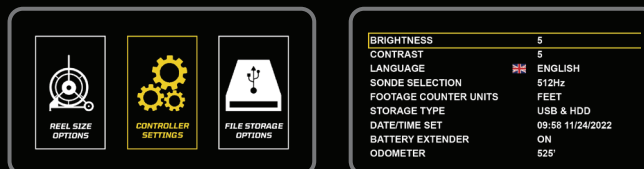

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com